

SPECIFICATIONS

CORES

Modular (4 section) patented aluminum heat recovery cores arranged for high efficiency crossflow ventilation.

MOTORS

Two PSC, 5 speed double shafted, 120 VAC, 3.15 Amps each (6.3 total on high speed). HP - 1/10, 1625 RPM. Watts - total on High Speed - 610.

FILTERS

Washable air filters in exhaust and supply air streams.

BLOWERS

Centrifugal type rated at 530 cfm (250 L/s) free air delivery. Each air stream has two centrifugal blowers driven by two PSC motors.

CONNECTION DUCT SIZES

Four - 14" x 8" H (356 mm x 200 mm H).

MOUNTING

Unit to be set on support brackets hung by threaded rod type apparatus (brackets and rods not included).

CASE

20 gauge prepainted galvanized steel (G60) for superior corrosion resistance. Insulated with foil faced insulation duct liner where required to prevent exterior condensation. Drain connection, One - 1/2" (12 mm) O.D.



CONTROLS

Digital Base Module operation, illuminated display pad, low voltage (12 VAC) terminals for connection to remote controls.

DEFROST

Supply bypass damper routes indoor air to defrost cores.

WEIGHT 178 lbs. (81 kg) **SHIPPING WEIGHT** 203 lbs. (92 kg)

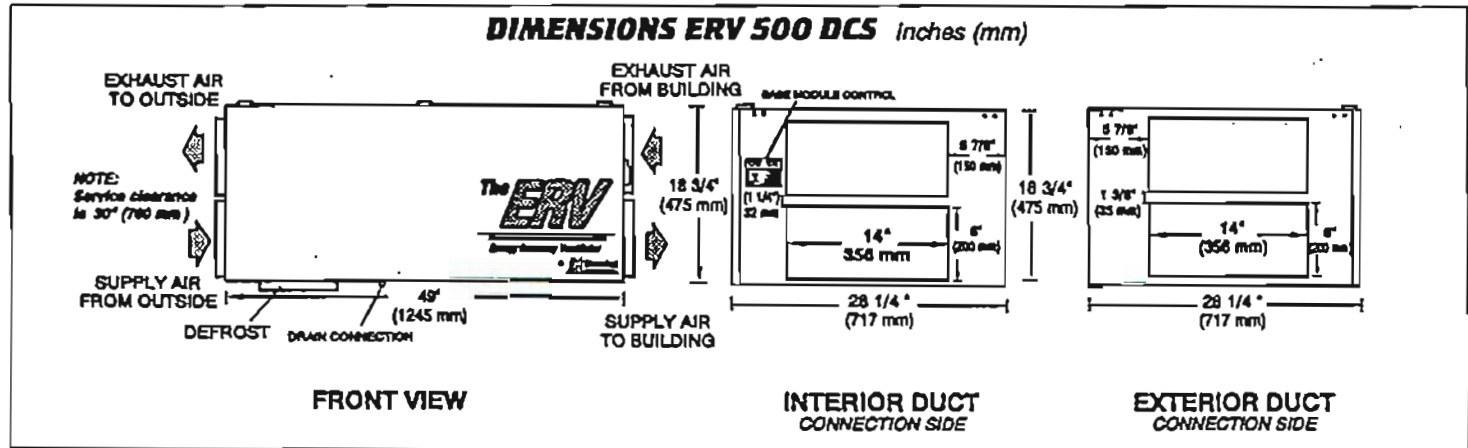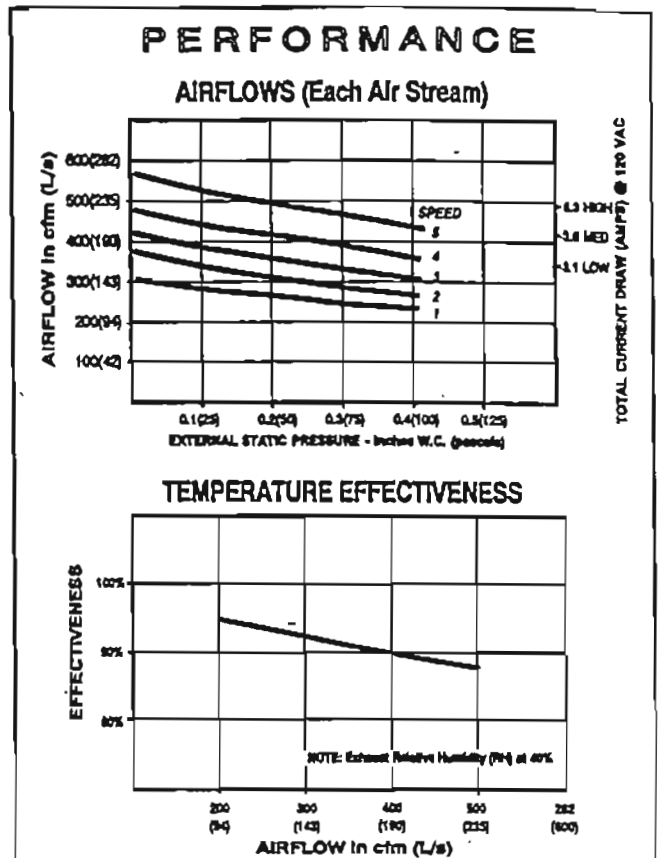

All units conform to CSA and UL standards

WARRANTY

All units carry a 2 year warranty on the heat recovery cores and replacement parts.

DATE: _____ UNIT SELECTED: _____

PROJECT: _____

MECHANICAL CONTRACTOR: _____